


**SS SAMPLING VALVE
WITH HEATING JACKET
VERTICAL LINE
MULTIPLE FUNCTION**

**EDELSTAHL-
PROBENAHMEVENTIL
MIT HEIZMANTEL
VERTIKALE ROHRLEITUNG
MULTIFUNKTIONELL**

**PRELEVEUR ACIER INOX
AVEC ENVELOPPE CHAUFFANTE
MONTAGE VERTICAL
MULTIFONCTION**

**Material | Werkstoff | Matière ¹⁾
1.4404 (316L) /PTFE**

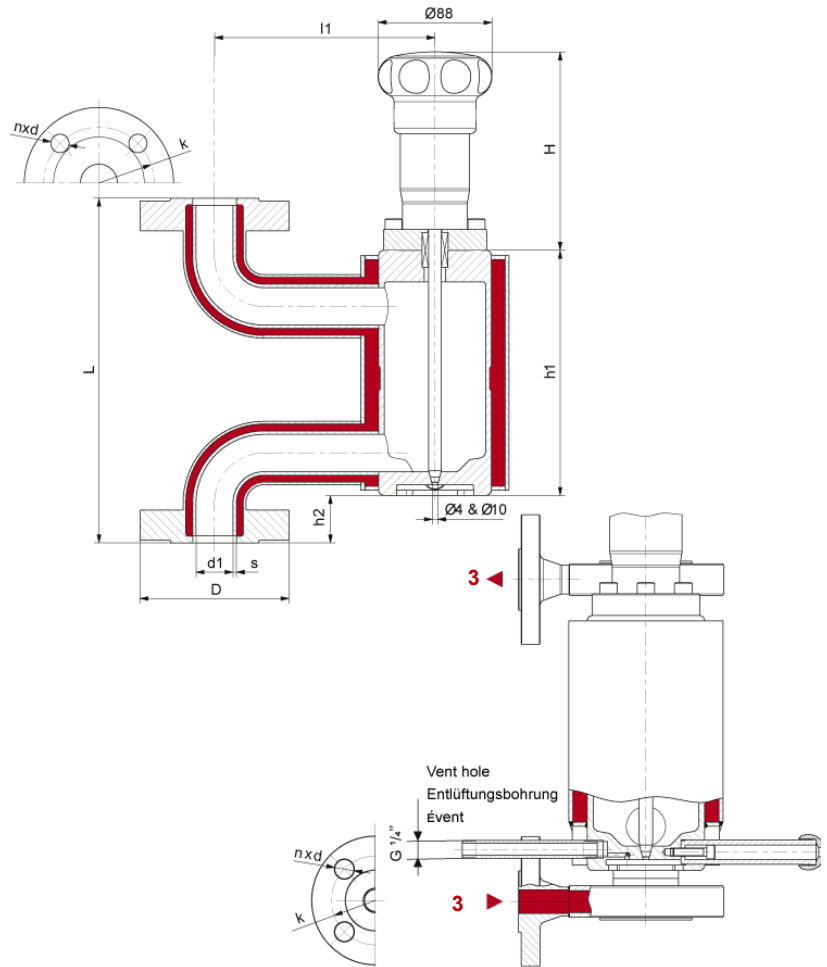

Dimensions/Abmessungen in mm

DIN – EN										
DN	L	l1	h1	h2	s	d1	D	Tk	nx	Kg
15	250	170	187	36	1.6	18.1	95	65	4x14	12.3
25	263	170	187	44	2	29.7	115	85		13.5
32	278	170	187	50	2	38.4	140	100		14.3
40	296	210	187	59	2	44.3	150	110	4x18	15.3
50	329	210	187	59	2.6	55.1	165	125		16.7
80	442	240	249	105	2.6	83.7	200	160		17.1
100	541	290	306	209	2.6	109.1	220	235	8x18	18.5

PS	TS	-40	0	100	150	200
	PN16	16	16	15.1	13.7	12.7
	PN40	16	16	16	16	16

³⁾ Heating jacket / Heizmantel / Enveloppe chauffante	
DN 15 / PN 40	PS : 31.8 bar @ 200°C (425 psi at 392°F) TS : -40/ +200°C (-40 / +392°F)

ANSI										
ANSI	L	l1	h1	h2	s	d1	D	Tk	nx	Kg
1/2	268	170	179	44	1.6	18.1	89	95	4X15.7	152
1	296	170	179	52	2	29.7	108	124	4X15.7	8.3
1 1/2	332	210	179	67	29.7	44.3	127	156		8.8
2	365	210	179	67	2.6	55.1	152	165	4X19.1	11.1
3	478	240	241	113	55.1	83.7	190	210		13.6
4	599	290	298	298	83.7	298	229	254	8X19.1	19.9

PS	TS °F (°C)	-20(-29)	0(-18)	200(94)	300(149)	400(205)
	150# psi(bar)	232(16)	232(16)	195(14)	175(12)	160(11)
	300# psi(bar)	232(16)	232(16)	232(16)	232(16)	232(16)

³⁾ Heating jacket / Heizmantel / Enveloppe chauffante	
1/2" 150 LBS	PS:160 psi@400°F (11bar@200°C) TS: -20/ 400°F
1/2" 300 LBS	PS:160 psi@400°F (11bar@200°C) TS: -20/ 400°F

¹⁾ other material on request | anderer Werkstoff auf Anfrage | autres matières sur demande

²⁾ vent hole connection | Entlüftungsbohrung-Anschluss | connexion d'évent