




2.1.1.5

VLB-01SP20-CC \_04/20-VMB- /

**PRELEVEUR AC. INOX**  
AVEC ENVELOPPE CHAUFFANTE  
MONTAGE VERTICAL  
MULTIFONCTION

**SS SAMPLING VALVE**  
WITH HEATING JACKET  
VERTICAL LINE  
MULTIPLE FUNCTION

**EDELSTAHL-  
PROBENAHRMEVENTIL**  
MIT HEIZMANTEL  
VERTIKALE ROHRLEITUNG  
MULTIFUNKTIONELL

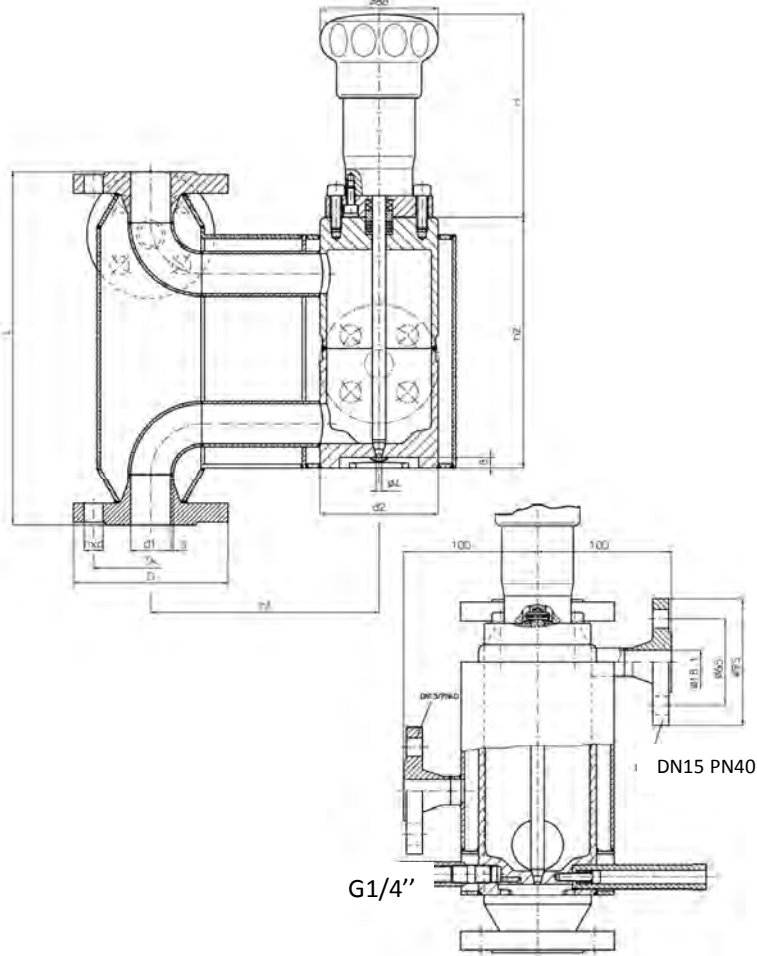

**Matière / Material / Werkstoff:**  
1.4435/1.4404 (316L)

DIN - EN																
DN	L	H	h1	h2	s	d1	d2	D		Tk		nxd		kg		
								PN16	PN40	PN16	PN40	PN16	PN40			
15	250	152	170	187	1.6	18.1	87	95	65	4x14						
20								105	75							
25	263				115			85	4x18					9.3		
32	278				140			100								
40	296				150			110								
50	329		210	2.6	55.1	165		125	4x18		11.1					
65	403				240	185		145					4x18	8x18		
80	442			241	2.6	83.7		113	200	160	8x18					
100	541		290	298	2.6	109.1		141.3	220	235	180	190	8x18	8x22		
150									285	300	240	250	8x22	8x26		

Matière / Material / Werkstoff: 1.4435/1.4404 (316L) - PTFE

PS	TS (°C)	-40	0	100	150	200
	PN16	16	16	15.1	13.7	12.7
	PN40	16	16	16	16	16

ANSI																
ANSI	L	H	h1	h2	s	d1	d2	D		Tk		nxd		kg		
								150#	300#	150#	300#	150#	300#			
1/2	268	152	170	187		44.3	87	88.9	95.2	60.5	66.5	4x15.7				
3/4								98.6	117	69.9	82.6	4x19.1				
1	296				108			124	79.2	88.9						
1 1/4					117			133	88.9	98.6						
1 1/2	332				210			2		44.3	87	127	155	98.6	114	4x22.4
2	365		152	165								121	127	4x19.1	8x19.1	
2 1/2			240							178	191	140	149	4x19.1	8x22.4	
3	478									191	210	152	168	4x19.1	8x22.4	
4	599		290	298	2.6			109.1	141.3	229	254	191	200	8x19.1	8x22.4	
6										279	318	241	270	8x22.4	12x22.4	

Matière / Material / Werkstoff: 1.4435/1.4404 (316L) - PTFE

PS	TS (°F)	-20	0	200	300	400
	150#	230	230	219	199	185
	300#	230	230	230	230	230

\* Option : Connexion d'évent / Vent hole connection / Entlüftungsbohrung-Anschluss : 5.10.1 (01701100)